



STYLE 700 API

TYPE A, ARRANGEMENT 1
TIPO A, ARRANGIAMENTO 1



Rotary single API682 seal for clean fluids applications.
Medium (Style 702) and high (Style 703) pressuredesign rotary faces available. Available with floating or fixed throttle bushing.

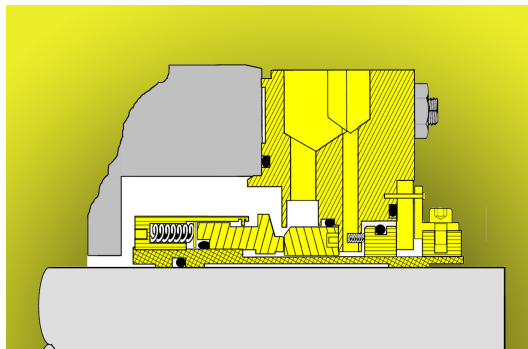


Tenuta singola rotante secondo API682 per applicazioni su fluidi puliti.
Disponibile con design delle facce per media (Style 702) ed alta (Style 703) pressione. Dotata di boccola fissa o flottante.



Sello rotativo único API682 para aplicaciones de fluidos limpios.
Disponibles con caras rotativas de diseño de presión media (estilo 702) y alta (estilo 703). Disponible con buje flotante o fijo.

TECHNICAL DATA / DATI TECNICI

Max pressure <i>Pressione max</i>	Up to 21 bar (Style 702: 42 bar; Style703: 70 bar) Up to 305 PSI (Style 702: 609 PSI; Style703: 1015 PSI)
Temp max	-40°C ÷ +305°C (-40°F ÷ +580°F)
Max speed <i>Velocità max</i>	25 m/sec (4920 FPM)
Special Features <i>Caratteristiche speciali</i>	Pumping ring for Plan 23 applications available (Style 701P)

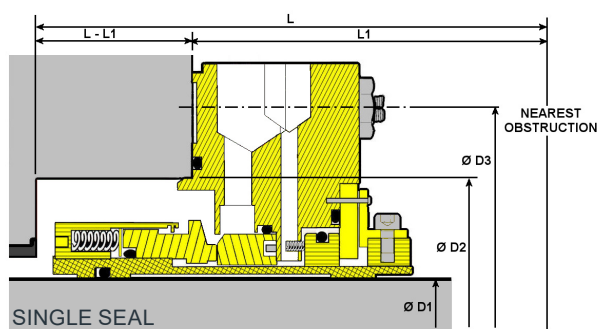


SEALTEK s.r.l.
www.sealtek.com
info@sealtek.com

All technical specifications contained in these technical data sheets are intended as guidelines. Sealtek s.r.l. must be informed about the precise conditions of application so that detailed information relating to specific cases can be provided.

06-2024

Seal Chamber	D1		D2		D3		L		L1		Stud Size	
Size	mm	in	mm	in	mm	in	mm	in	mm	in	SI	USC
1	20	0,787	70	2,756	105	4,13	150	5,90	100	3,94	M12 x 1,75	1/2"-13
2	30	1,181	80	3,150	115	4,53	155	6,10	100	3,94	M12 x 1,75	1/2"-13
3	40	1,575	90	3,543	125	4,92	160	6,30	100	3,94	M12 x 1,75	1/2"-13
4	50	1,968	100	3,937	140	5,51	165	6,50	110	4,33	M16 x 2,0	5/8"-11
5	60	2,362	120	4,724	160	6,30	170	6,69	110	4,33	M16 x 2,0	5/8"-11
6	70	2,756	130	5,118	170	6,69	175	6,89	110	4,33	M16 x 2,0	5/8"-11
7	80	3,150	140	5,512	180	7,09	180	7,09	110	4,33	M16 x 2,0	5/8"-11
8	90	3,543	160	6,299	205	8,07	185	7,28	120	4,72	M20 x 2,5	3/4"-10
9	100	3,937	170	6,693	215	8,46	190	7,48	120	4,72	M20 x 2,5	3/4"-10
10	110	4,331	180	7,087	225	8,86	195	7,68	120	4,72	M20 x 2,5	3/4"-10