

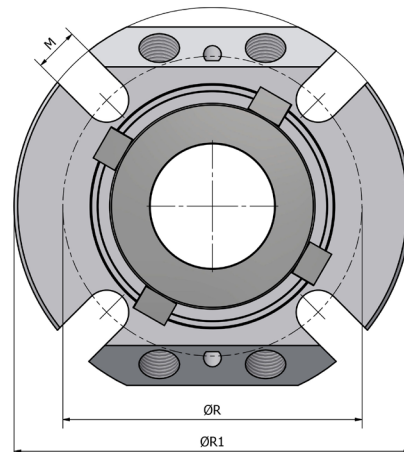


STYLE 777 SO

SINGLE STATIONARY BALANCED CARTRIDGE SEAL, WITH FLUSH, QUENCH AND LIP SEAL

TENUTA SINGOLA STAZIONARIA A CARTUCCIA, BILANCIATA CON FLUSSAGGIO E QUENCH, TENUTA SUPPLEMENTARE A LABBRO

SELLO DE CARTUCHO EQUILIBRADO ESTACIONARIO ÚNICO, CON LAVADO, ENFRIAMIENTO Y SELLO DE LABIO

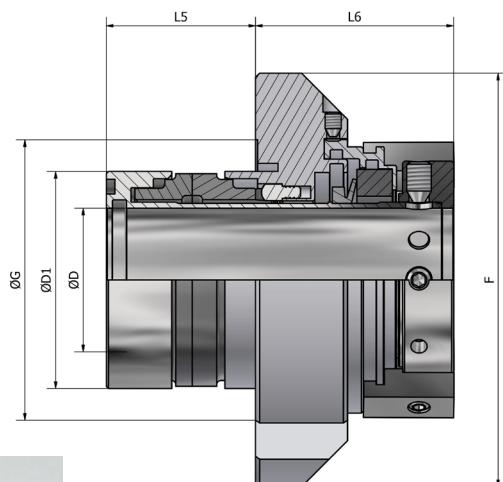

D	D	R	R1	M	F	L5	L6	D1	G
mm	inch	mm	mm	mm	mm	mm	mm	mm	mm
24,0	-	73,0	103,0	12,5	93,0	36,5	48,5	42,9	58,0
25,0	1000,0	73,0	103,0	12,5	93,0	36,5	48,5	42,9	58,0
28,0	1125,0	78,0	105,0	12,5	95,0	36,4	48,6	45,9	61,0
30,0	-	79,5	105,0	12,5	95,0	36,5	48,5	48,0	63,0
32,0	1250,0	82,5	108,0	12,5	100,0	36,5	48,5	50,0	65,5
33,0	-	82,5	108,0	12,5	100,0	36,5	48,5	50,0	65,5
35,0	1375,0	84,5	112,0	12,5	101,0	36,5	48,5	53,0	68,0
38,0	1500,0	87,0	118,0	12,5	106,0	36,5	48,5	56,0	72,0
40,0	-	90,0	124,0	12,5	110,0	36,5	48,5	58,0	73,0
42,0	-	96,0	140,0	14,5	120,0	36,5	48,5	60,8	75,5
43,0	1625,0	96,0	140,0	14,5	120,0	36,5	48,5	60,8	75,5
45,0	1750,0	96,0	140,0	14,5	125,0	36,5	48,5	63,0	77,8
48,0	1875,0	101,0	144,0	14,5	130,0	36,5	48,5	68,0	82,8
50,0	2000,0	101,0	144,0	14,5	130,0	36,5	48,5	68,0	82,8
53,0	2125,0	109,5	150,0	17,5	135,0	36,5	48,5	73,0	87,0
55,0	-	109,5	150,0	17,5	135,0	36,5	48,5	73,0	87,0
58,0	-	119,5	157,0	17,5	140,0	36,5	48,5	78,0	93,0
60,0	2250,0	119,5	157,0	17,5	140,0	36,5	48,5	78,0	93,0
-	2375,0	119,5	157,0	17,5	140,0	36,5	48,5	78,0	93,0
63,0	2500,0	126,5	165,0	17,5	149,0	38,5	48,5	87,4	101,5
65,0	-	126,5	165,0	17,5	149,0	38,5	48,5	87,4	101,5
68,0	2625,0	128,5	170,0	17,5	156,0	38,5	48,5	92,0	107,0
70,0	2750,0	128,5	170,0	17,5	156,0	38,5	48,5	92,0	107,0
-	2875,0	146,0	185,0	17,5	165,0	48,0	74,2	99,5	120,5
75,0	-	146,0	185,0	17,5	165,0	48,0	74,2	99,5	120,5
-	3000,0	152,5	190,0	17,5	171,0	50,6	64,0	104,5	130,0
80,0	3125,0	152,5	190,0	17,5	171,0	50,6	64,0	104,5	130,0
-	3250,0	162,0	195,0	17,5	176,0	50,7	63,0	109,5	132,8
85,0	3375,0	162,0	195,0	17,5	176,0	50,7	63,0	109,5	132,8
90,0	3500,0	170,5	210,0	20,5	179,2	48,5	65,5	114,5	140,8
-	3625,0	174,0	218,8	20,5	190,0	44,8	68,5	124,5	146,5
95,0	3750,0	174,0	218,8	20,5	190,0	44,8	68,5	124,5	146,5
100,0	3875,0	174,0	218,8	20,5	190,0	44,8	68,5	124,5	146,5

TECHNICAL DATA / DATI TECNICI

Metal parts <i>Parti metalliche</i>	G*
Elastomers <i>Elastomeri</i>	M1 - K - X1 - X*
Sliding faces <i>Facce di tenuta</i>	A - V2 - Q1 - Q2 - U2
Springs <i>Molle</i>	M5
Pressure <i>Pressione</i>	Vacuum/Vuoto 700 mm Hg ÷ 25 Kg/cm ^{3**}
Temp	Upon elastomers <i>Secondo elastomeri</i>
Speed <i>Velocità</i>	25 m/sec Upon sliding faces material <i>Secondo materiale delle facce</i>
Dimensions <i>Dimensioni</i>	25-100 mm/1-4" ***

*Other materials available upon request
*Altri materiali disponibili su richiesta

**Upon shaft diameter and speed
**Variabile in dipendenza al diametro e alla velocità

***Other sizes available up to 190mm
***Altre misure sono disponibili fino a 190mm

SEALTEK s.r.l.
www.sealtek.com
info@sealtek.com

All technical specifications contained in these technical data sheets are intended as guidelines. Sealtek s.r.l. must be informed about the precise conditions of application so that detailed information relating to specific cases can be provided.

06-2024