


STYLE 907 HT

CARTRIDGE MOUNTED REFILLABLE SEAL - HIGH TEMPERATURE
TENUTA A CARTUCCIA RICARICABILE - ALTE TEMPERATURE
SELLO RECARGABLE MONTADO EN CARTUCHO - ALTA TEMPERATURA

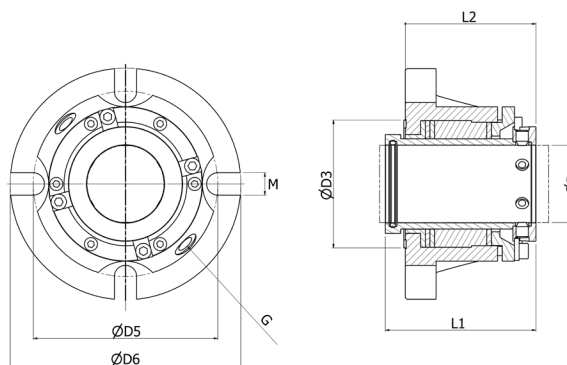

 No heat exchanger required. This version is loaded with Style Seven graphite fibers, and is equipped with bronze wear parts and graphite gaskets to withstand temperature up to 450°C, with peak resistance of over 550°C.

 Non è necessario alcuno scambiatore di calore. Questa versione è caricata con fibre di grafite Style Seven ed è dotata di parti antiusura in bronzo e guarnizioni in grafite per resistere a temperature fino a 450°C, con resistenza di picco superiore a 550°C.

 No se requiere intercambiador de calor. Esta versión está cargada con fibras de grafito Estilo Siete y está equipada con piezas de desgaste de bronce y juntas de grafito para soportar temperaturas de hasta 450 °C, con una resistencia máxima de más de 550 °C.

TECHNICAL DATA / DATI TECNICI

Sealing compound	Unbleached PTFE, graphite, aramid fibers, food grade PTFE
O-rings	NBR, EPDM, FKM, FEP, FFKM, graphite
Sleeve coating	Silicon carbide, DLC, ceramic
Metal parts	1.4571 CrNiMo Steel (316Ti), exotic alloys
Pressure	Max 4 MPa* (580 PSI)
Temperature	Max 450°C (842°F) - peak 550°C (1022°F)
Speed	Max 25 m/s (4921 FPM)
*Actual pressure limit may vary.	

D	In	D3	D5	D6	L1	L2	M	G
24		58,0	80,0	104,0	85,0	73,0	13,0	2 x 3/8 GAS
25	1							
28	1,125	61,5	80,0	104,0	85,0	73,0	13,0	2 x 3/8 GAS
30		63,0	90,0	110,0	85,0	73,0	13,0	2 x 3/8 GAS
32	1,25							
33		65,5	100,0	110,0	85,0	73,0	13,0	2 x 3/8 GAS
35	1,375	68,0	100,0	128,0	85,0	73,0	13,0	2 x 3/8 GAS
38	1,5	72,0	100,0	128,0	85,0	73,0	13,0	2 x 3/8 GAS
40		73,0	100,0	128,0	85,0	73,0	13,0	2 x 3/8 GAS
43	1,625	75,5	106,0	142,0	98,0	85,0	14,0	2 x 3/8 GAS
45	1,75	77,8	106,0	142,0	98,0	85,0	14,0	2 x 3/8 GAS
48	1,875							
50	2	82,8	120,0	154,0	98,0	85,0	14,0	2 x 3/8 GAS
55	2,125	87,0	120,0	172,0	98,0	85,0	14,0	2 x 3/8 GAS
58	2,25							
60		93,0	120,0	172,0	98,0	85,0	17,0	2 x 3/8 GAS
	2,375							
65	2,5	101,5	134,0	180,0	98,0	85,0	17,0	2 x 3/8 GAS
	2,625							
70	2,75	108,0	134,0	180,0	98,0	85,0	17,0	2 x 3/8 GAS
75	2,875							
	3	120,5	148,0	200,0	98,0	85,0	19,0	2 x 3/8 GAS
80	3,125	130,0	148,0	200,0	105,0	91,0	19,0	2 x 3/8 GAS
85	3,25							
	3,375	132,8	160,0	220,0	105,0	91,0	20,0	2 x 3/8 GAS
90	3,5							
	3,625	140,8	160,0	220,0	105,0	91,0	20,0	2 x 3/8 GAS
95								
	3,75							
	3,875	146,5	176,0	240,0	105,0	91,0	20,0	2 x 3/8 GAS
100	4							


SEALTEK s.r.l.
www.sealtek.com
info@sealtek.com

All technical specifications contained in these technical data sheets are intended as guidelines. Sealtek s.r.l. must be informed about the precise conditions of application so that detailed information relating to specific cases can be provided.

06-2024